

Product Name: PEEK

Product features

Hydrolysis-resistant, chemical-resistant, and wear-resistant, with UL94 V-0 flame retardancy.

Exceptional toughness and high mechanical strength.

Excellent dimensional stability and outstanding fatigue resistance.

High temperature resistance and good electrical properties.

Main applications:

Aerospace, automotive components, medical devices, electronic components, etc.

Points for attention:

For long-term printing, the nozzle needs to be replaced; print at a low speed.

Properties	Test Method	Test Condition	S.I. Units	Typical Values
Mechanical				
(X-Y) Tensile Strength	ISO 527/2	50 mm/min	MPa	77
(X-Y) Young's Modulus	ISO 527/2	1 mm/min	MPa	/
(X-Y) Elongation at break	ISO 527/2	50 mm/min	%	21
(X-Y) Flexural Strength	ISO 178	2 mm/min	MPa	122
(X-Y) Flexural Modulus	ISO 178	2 mm/min	MPa	3163
(X-Y) Izod Impact Strength of Notched Specimen	ISO 180	23°C	KJ/m ²	138
(Z-X) Izod Impact Strength of Unnotched Specimen	ISO 180	23°C	KJ/m ²	/
Shore Hardness	ISO 868	23°C	HA/HD	83
Thermal				
(X-Y) Heat Distortion (HDT)	ISO 75	0.45 MPa	°C	147
Glass Transition (Tg)	ISO 11357-2	10 °C/min	°C	143
Melting Temperature	ISO 11357-3	10 °C/min	°C	343
@5%Decomposition Temp.	ISO 11358	20 °C/min	°C	≥425
Vicat Softening Temp.	ISO 306	5kg, 50°C/h	°C	/
Moulding Shrinkage	ISO 294	23°C	%	1
Coefficient of Thermal Exp.	ISO 11359-2		µm (m °C)	/
Others				
Melt Mass-flow Rate	ISO 1133	210°C/2.16 kg	g/10 min	17
Density	ISO 1183	23°C	g/cm ³	1.1965
Volume Resistivity	IEC 60093	-	ohm-cm	1×10 ⁶
Permittivity	IEC 60250	1 kHz		2.8
Flammability	UL 94	1.5 mm	Class	V0
Chemical				

SUNLU	Number	SL-TE-WI-061
TECHNICAL DATA SHEET ISO	Version	A/1
	Page/Total	2/4

Item	Class
Weak Acid (pH 3-6)	Excellent
Strong Acid (pH<3)	Excellent
Weak Bases (pH 8-10)	Excellent
Strong Bases (pH >10)	Excellent
Deionized Water	Excellent
Alcohol	Good
Ketone	Normal
Petroleum Fuels	Normal
Ester	Normal



Grade: Excellent, Good, Normal, Bad

Recommended Printing Parameters



Parameters	Range	
Nozzle Temp.	Temperature °C	Speed mm/s
	390	30
	420	60
Plate Temp.	110-120°C	
Plate Material	Carbon Platform	
Plate Treatment	GULE	
Cooling Fan	Open <input checked="" type="checkbox"/> /Close <input type="checkbox"/>	
Raft Distance	0.4-0.6mm	
Retraction Distance	1-1.5mm	
Retraction Speed	30-40mm/s	
Room Temp.	Room Temperature	
Supported Material	PVA	
Drying Temp.	110-140°C, 4-6H	

The above values are provided for printer reference only. The parameters may be appropriately adjusted according to different printer models, printed objects, and specific application requirements.



TENSILE TESTING SPECIMEN

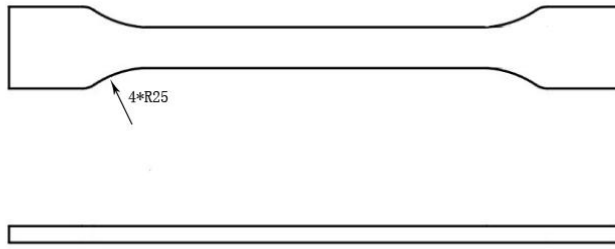

FLEXURAL TESTING SPECIMEN

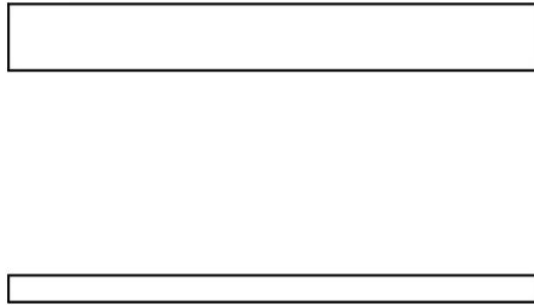

IMPACT TESTING SPECIMEN

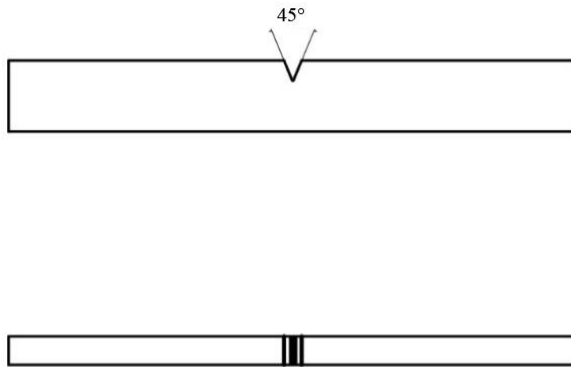

Note:

- [1] Test specimens were printed at a printing speed of 30 mm/s and a printing temperature of 390 °C. Infill: 100%, with a 90° raster orientation.
- [2] The typical values represent average laboratory data and are provided for reference only. They do not constitute product specifications. Results may vary depending on different printers.

Safety and Handling Precautions

A Material Safety Data Sheet (SDS) for this product is available from your local Sunlu office.

TECHNICAL DATA SHEET ISO

The SDS provides customers with information on material handling, safety and disposal, as well as the requirements of applicable local health and safety regulations. The following are general precautions and apply only to the resins supplied. The various additives and processing aids used in plastics moulding and other materials used in secondary processes have their own safety requirements and must be understood separately.

This product has extremely low toxicity, and under normal conditions of use, there are no particular issues with inhalation, eye contact, or skin contact. However, care must be taken when handling, storing, using or disposing of these resins. Workplace should be kept clean to avoid dust accumulation. Contact with molten resins during processing operations should be minimized. Plastic resin products generate dust and gases during the manufacturing process. Dust generated during operations such as sawing, filing and sanding of printed parts may irritate the eyes and upper respiratory tract. In dusty manufacturing environments, it is recommended that operators use respirators or masks approved

by the appropriate authorities.

The print processing area should be well ventilated as required by proper operating procedures. When plastics are processed above the melting temperature, fumes containing decomposing substances are released and may be irritating. In most cases, good general ventilation equipment is sufficient. Local extract ventilation should be used when necessary.

When there is a risk of eye injury from airborne particles during work, protective goggles should be worn. If necessary, wear insulated gloves for protection when handling the resin.

The product may yellow under the action of ultraviolet light, so it should be stored away from direct sunlight.

Users are advised to investigate the final use of their product beforehand to ensure the correct use of Sunlu products. To prevent misuse or incorrect use of Sunlu products, it is advisable to contact the Sunlu R&D department or the marketing department.

Note: Due to variations in usage conditions and applicable laws by location and time, customers are responsible for determining whether the products and product information in this document are suitable for their use. Customers should ensure that their workspaces and handling methods comply with applicable laws and other government regulations. Sunlu assumes no responsibility or liability for the information in this document and does not provide any warranties. All implied warranties of merchantability or fitness for a particular purpose under this document are hereby expressly excluded.